Copyright MWE NA Inc., all rights reserved. Reproduction or other use of these designs Technical drawings are subject to change without notice. without written consent from MWE NA Inc. is prohibited. All millimeter dimensions are exact and supersede inch conversions. Ladder height at or above 3000mm [118 1/8"] require safety side rails SL.6052.AK AFF = Above Finished Floor (Standard) 150mm [5 7/8"] 32 5 (37 5 / 42 5 / 47 5 / 52 5 mm) ST.3003.KL.20 max. 900mm ST.2000 ST.2100 - Ø50mm [1 15/16"]4 DIN 912 / wood screw Ø25mm [1"] *Mounting positions may be specified on 103.5mm [4 1/16"] purchase order. Solid Wood backing required for full length of rail Specify center line rail height AFF on purchase Wood Step/Tread -Specify wood type and finish on purchase order: Available finish: clear lacquered raw (unfinished) oiled or waxed 30mm x 20mm A-AAvailable wood type: Maple [SL.6015.A] Beech [SL.6016.B] White Oak [SL.6016.E] Wenge [SL.6017.W] Chestnut [SL.6017.K] 100mm [3 15/16"] 500mm [19 11/16"] Zebrano [SL.6015.Z] Teak [SL.6017.T] Walnut [SL.6018.N] 15° Cherry [SL.6016.K] Smoked Oak [SL.6016.RE]

95mm [3 3/4"]

Sc. 6016.RE] A A 520mm [20 1/2"] 800mm [31 1/2"]

Stainless Steel Manufacturer NORTH AMERICA

E m a i l : s a l e s @ m w e - n a . c o m www.mwe-na.com


Industrial Akzent Ladder

SL.6022

Date Prepared: January 2023

Prepared By: AB

Ladder height at or above 3000mm [118 1/8"] require safety side rails SL.6052.AK

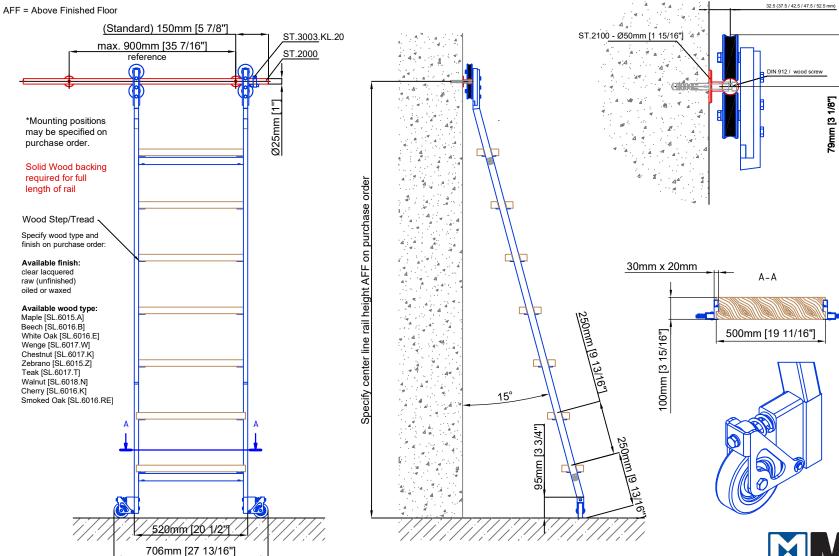

Industrial Ladder Quattro

SL.6022.Q

Date Prepared: January 2023

Prepared By: AB

NORTH AMERICA Email: sales@mwe-na.com www.mwe-na.com