
Technical drawings are subject to change without notice. All millimeter dimensions are exact and supersede inch conversions. Copyright MWE NA Inc., all rights reserved. Reproduction or other use of these designs without written consent from MWE NA Inc. is prohibited.

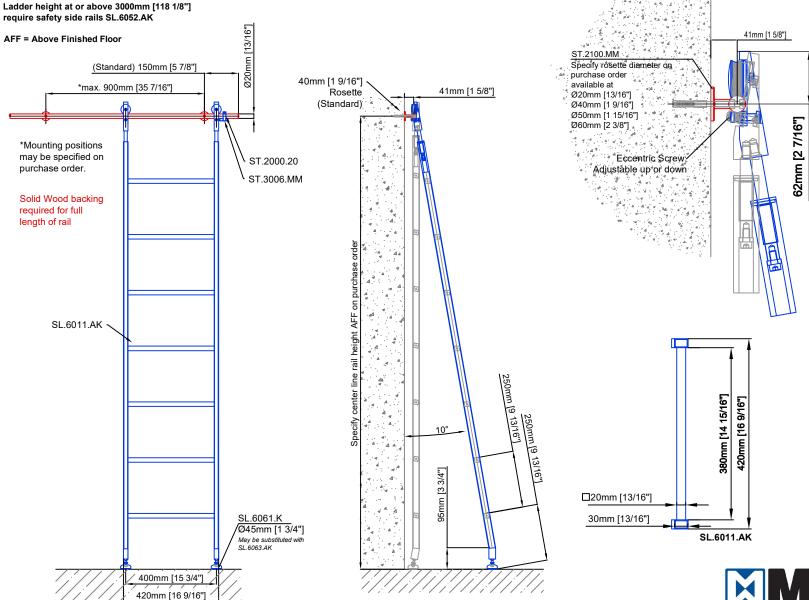

Telescopic Ladder

SL.6003.AK

Date Prepared: January 2023

Prepared By: AB

Stainless Steel Manufacturer NORTH AMERICA

Technical drawings are subject to change without notice. Copyright MWE NA Inc., all rights reserved. Reproduction or other use of these designs without written consent from MWE NA Inc. is prohibited. All millimeter dimensions are exact and supersede inch conversions. Ladder height at or above 3000mm [118 1/8"] require safety side rails SL.6052.AK 41mm [1 5/8"] AFF = Above Finished Floor ST.2100.MM Specify rosette diameter on purchase order 40mm [1 9/16"] 41mm [1 5/8"] (standard) 150mm [5 7/8"] Rosette Ø20mm [13/16"] *max. 900mm [35 7/16"] (standard) Ø40mm [1 9/16"] Ø50mm [1 15/16"] 62mm [2 7/16"] *Mounting positions may be specified on ST.2000.20 purchase order. ST.3006.MM Solid Wood backing required for full length of rail SL.6013 400mm [15 3/4"] 95mm [3 3/4"] SL.6061.K 30mm [1 3/16"] Ø45mm [1 3/4"] May be substituted with SL.6063.AK 400mm [15 3/4"] 420mm [16 9/16"] Stainless Steel Manufacturer **Telescoping Ladder** NORTH AMERICA

SL.6003.AK.E

Date Prepared: January 2023

Prepared By: AB

Copyright MWE NA Inc., all rights reserved. Reproduction or other use of these designs without written consent from MWE NA Inc. is prohibited. Technical drawings are subject to change without notice. All millimeter dimensions are exact and supersede inch conversions. Ladder height at or above 3000mm [118 1/8"] Ø20mm [13/16"] require safety side rails SL.6052.AK AFF = Above Finished Floor 40mm [1 9/16"] (Standard) 150mm [5 7/8"] Rosette 41mm [1 5/8"] *max. 900mm [35 7/16"] (Standard) 41mm [1 5/8"] *Mounting positions purchase order may be specified on ST.2000.20 available at purchase order. Ø20mm [13/16"] ST.3006.MM Ø40mm [1 9/16"] Solid Wood backing Ø50mm [1 15/16"] required for full 62mm [2 7/16"] Ø60mm [2 3/8"] length of rail Specify center line rail height AFF on purchase orde Wood Step/Tread Specify wood type and finish on purchase order: Available finish: clear lacquered raw (unfinished) Oiled or waxed Available wood type: Maple [SL.6015.A] Beech [SL.6016.B] White Oak [SL.6016.E] Wenge [SL.6017.W] Chestnut [SL.6017.K] Zebrano [SL.6015.Z] Teak [SL.6017.T] Walnut [SL.6018.N] Cherry [SL.6016.K]

> SL.6061.K Ø45mm [1 3/4"] May be substituted with SL.6063.AK

400mm [15 3/4" 420mm [16 9/16"]

Telesopic Ladder

SL.6003.AK.H

Date Prepared: January 2023 Prepared By: AB



Copyright MWE NA Inc., all rights reserved. Reproduction or other use of these designs Technical drawings are subject to change without notice. without written consent from MWE NA Inc. is prohibited. All millimeter dimensions are exact and supersede inch conversions. Ladder height at or above 3000mm [118 1/8"] require safety side rails SL.6052.KL AFF = Above Finished Floor 41mm [1 5/8"] 150mm [5 7/8"] *max. 900mm [35 7/16"] 40mm [1 9/16"] 41mm [1 5/8"] Specify rosette diameter on Rosette purchase order (Standard) available at Ø20mm [13/16"] Ø40mm [1 9/16"] Ø50mm [1 15/16"] *Mounting positions 51mm [2"] Ø60mm [2 3/8⁴] may be specified on ST.2000.20 purchase order. ST.3006.MM Solid Wood backing 55mm [2 3/16"] required for full length of rail Specify center line rail height AFF on purchase order SL.6011.KL 10° SL.6011.KL SL.6061.K /Ø45mm [1 3/4"]

Telescoping Ladder

SL.6003.KL

Date Prepared: January 2023 Prepared By: AB

May be substituted with

400mm [15 3/4"] 430mm [16 15/16"



