
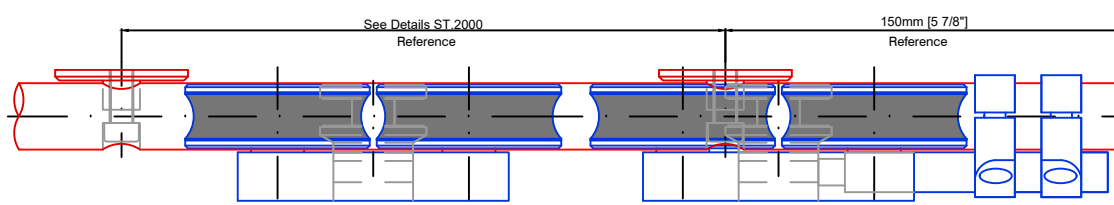


Technical drawings are subject to change without notice.
All millimeter dimensions are exact and supersede inch conversions.

Copyright MWE NA Inc., all rights reserved. Reproduction or other use of these designs without written consent from MWE NA Inc. is prohibited.

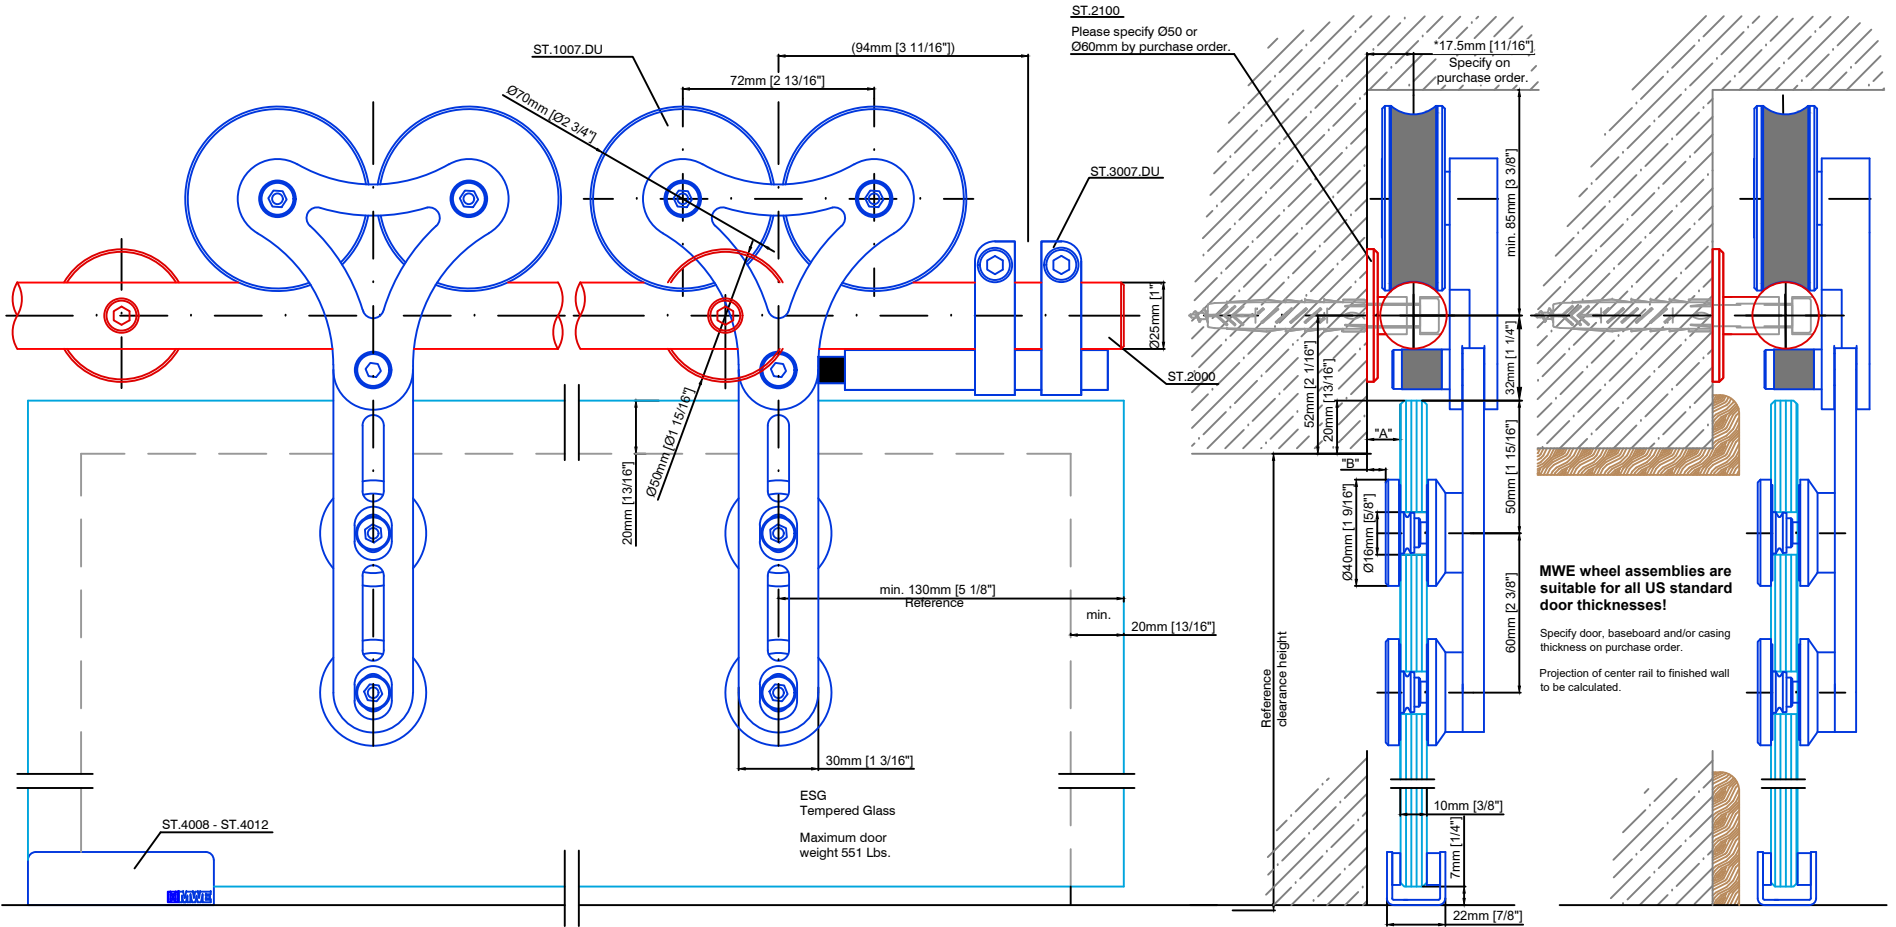

Dimension	Glass		
	8mm	10mm	12mm
A	14.5mm	12.5mm	10.5mm
B	9mm	7mm	5mm

Dimension	Glass		
	5/16"	3/8"	1/2"
A	9/16"	1/2"	7/16"
B	3/8"	1/4"	3/16"

MWE wheel assemblies are suitable for all US standard door thicknesses!

Specify door, baseboard and/or casing thickness on purchase order.
Projection of center rail to finished wall to be calculated.

(*) ST.2100 Projection (center rail to finished wall)

17.5mm [11/16"]	37.5mm [1 1/2"]
22.5mm [7/8"]	42.5mm [1 11/16"]
27.5mm [1 1/16"]	47.5mm [1 7/8"]
32.5mm [1 1/4"]	52.5mm [2 1/16"]




Email: info@mwe-na.com
www.mwe-na.com

Duplex ST.1007.DU

Date Prepared: July 2018 | Prepared By: CDA | JRT

Technical drawings are subject to change without notice.
All millimeter dimensions are exact and supersede inch conversions.

Copyright MWE NA Inc., all rights reserved. Reproduction or other use of these designs without written consent from MWE NA Inc. is prohibited.

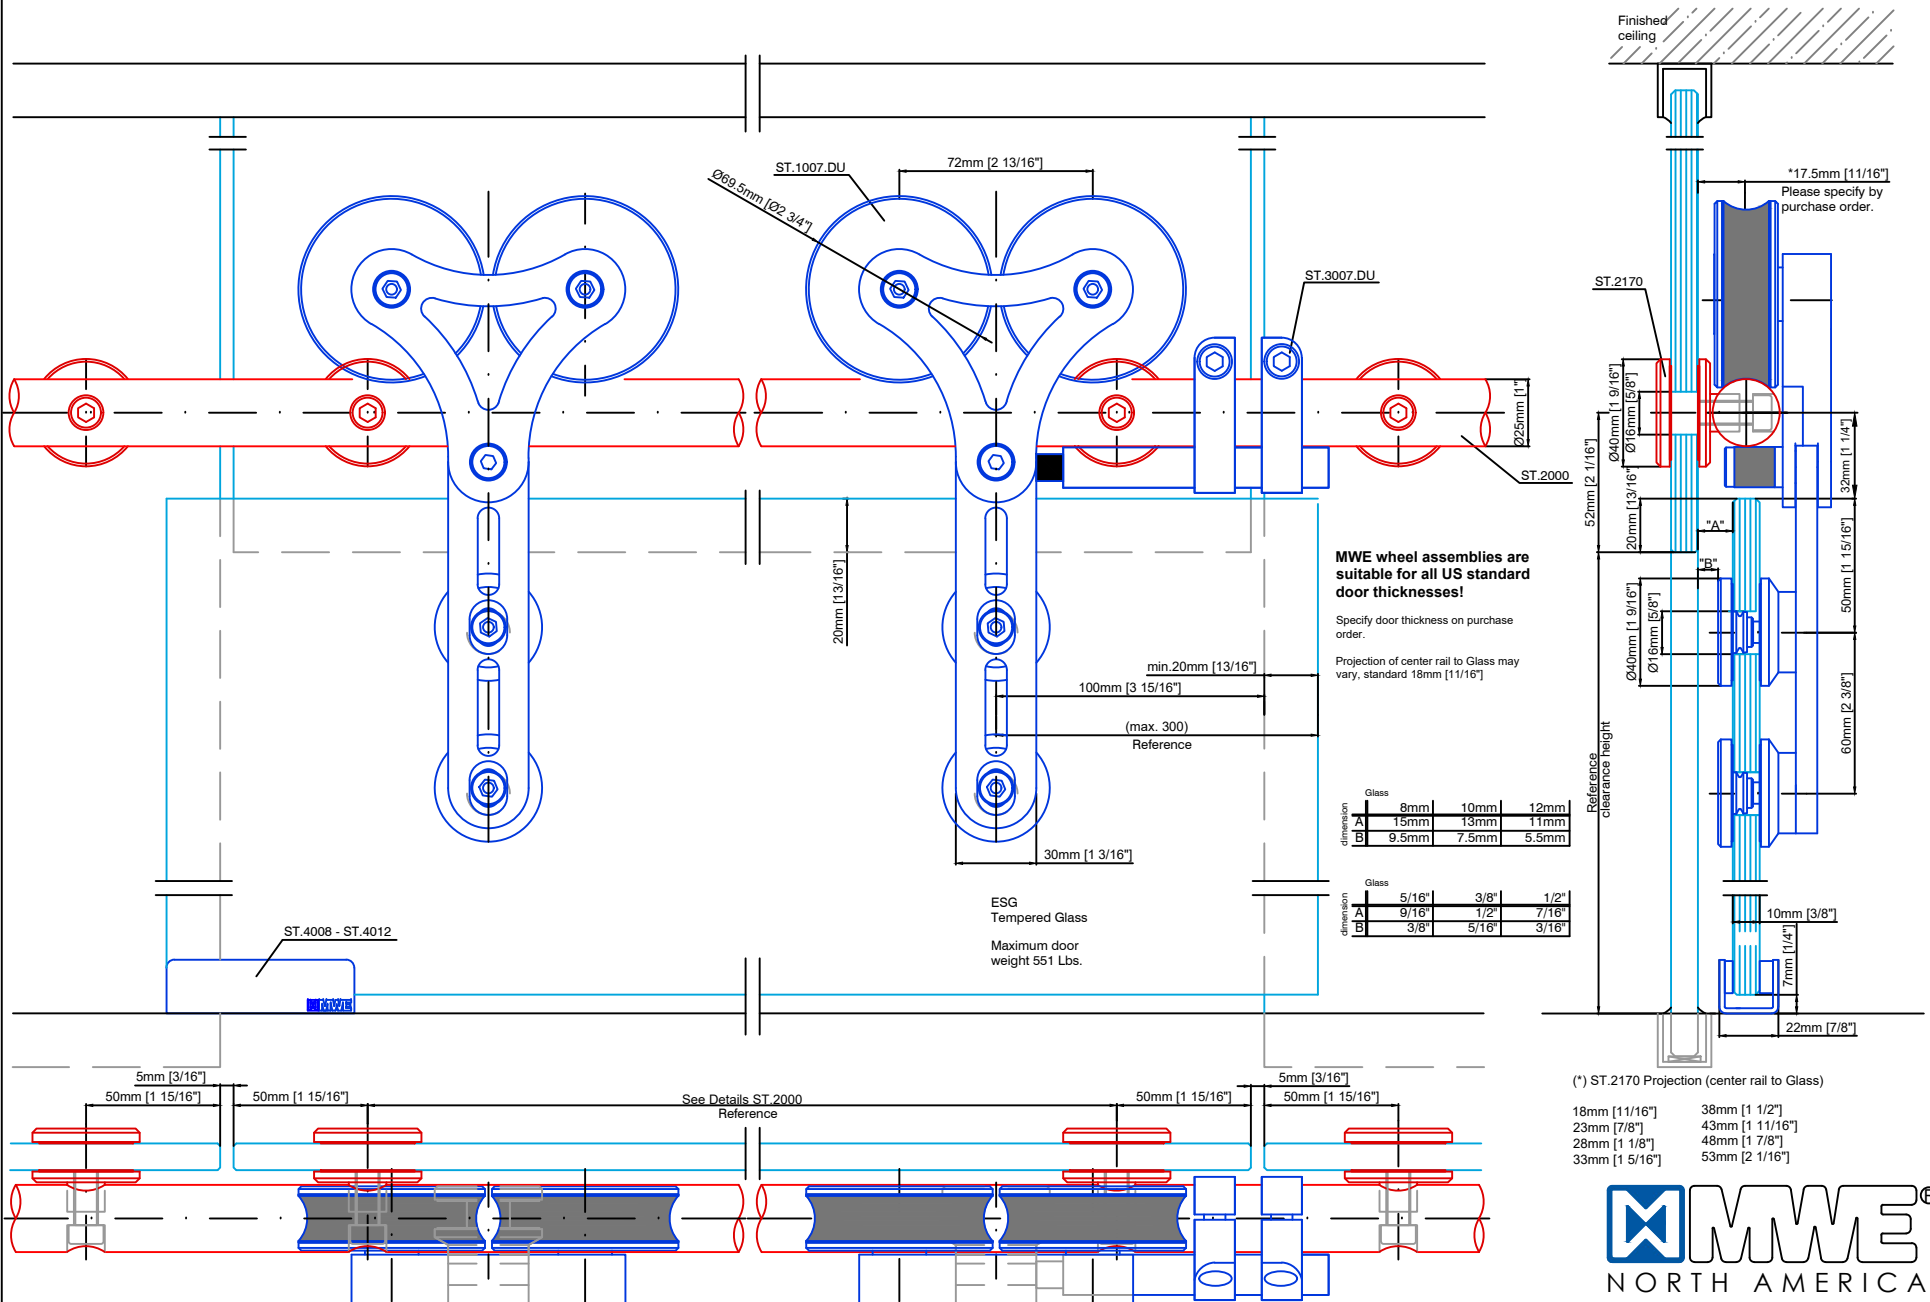

Duplex ST.1007.DU

Date Prepared: July 2018


Prepared By: CDA | JRT

MWE
NORTH AMERICA

Email: info@mwe-na.com
www.mwe-na.com

Technical drawings are subject to change without notice.
 All millimeter dimensions are exact and supersede inch conversions.

Copyright MWE NA Inc., all rights reserved. Reproduction or other use of these designs without written consent from MWE NA Inc. is prohibited.

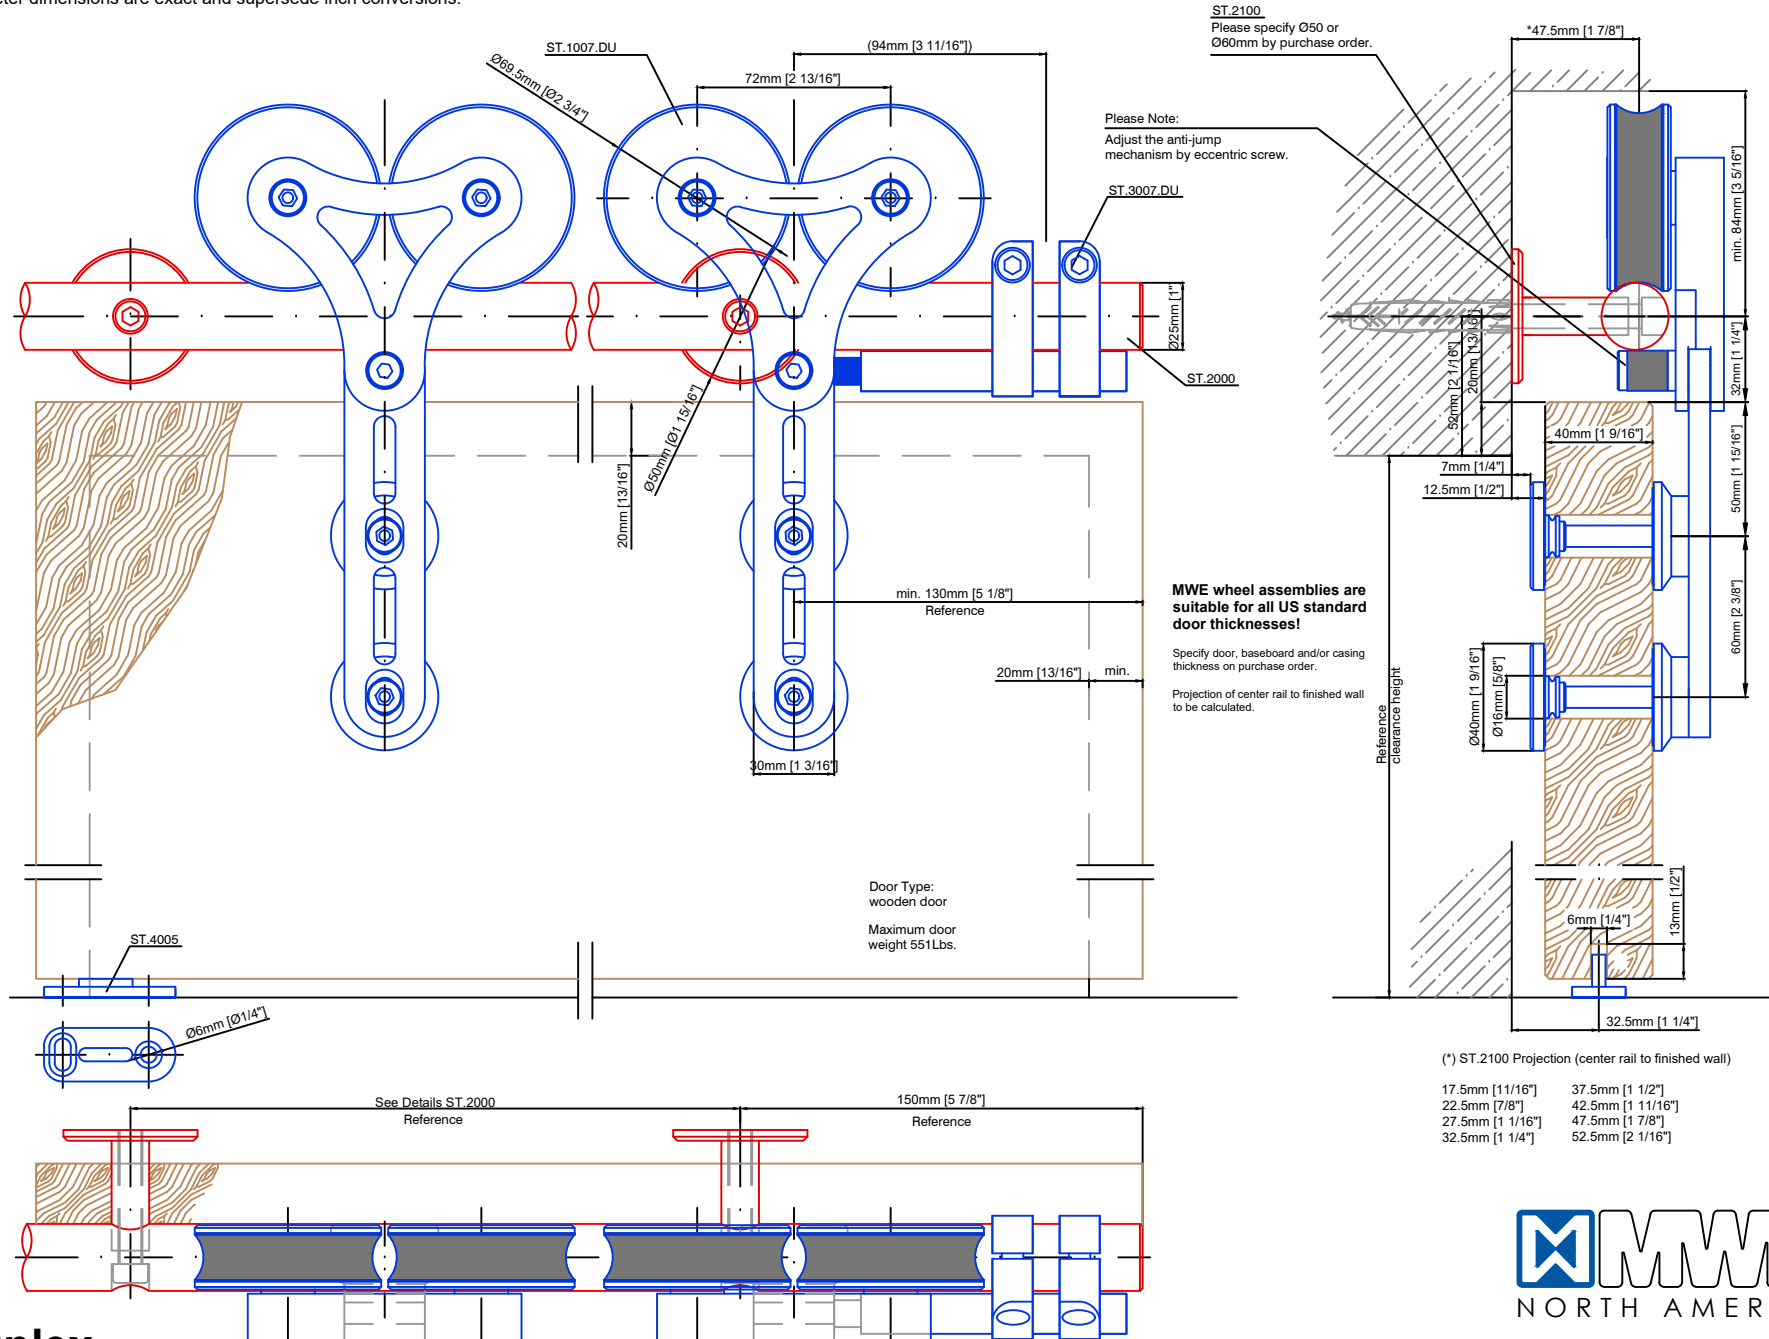

Please Note:
 Adjust the anti-jump mechanism by eccentric screw.

ST.2100
 Please specify $\varnothing 50$ or $\varnothing 60\text{mm}$ by purchase order.

MWE wheel assemblies are suitable for all US standard door thicknesses!
 Specify door, baseboard and/or casing thickness on purchase order.
 Projection of center rail to finished wall to be calculated.

(*) ST.2100 Projection (center rail to finished wall)

17.5mm [11/16"]	37.5mm [1 1/2"]
22.5mm [7/8"]	42.5mm [1 11/16"]
27.5mm [1 1/16"]	47.5mm [1 7/8"]
32.5mm [1 1/4"]	52.5mm [2 1/16"]

Duplex ST.1007.DU


Date Prepared: July 2018 | Prepared By: CDA | JRT



Email: info@mwe-na.com
www.mwe-na.com

Technical drawings are subject to change without notice.
 All millimeter dimensions are exact and supersede inch conversions.

Copyright MWE NA Inc., all rights reserved. Reproduction or other use of these designs without written consent from MWE NA Inc. is prohibited.

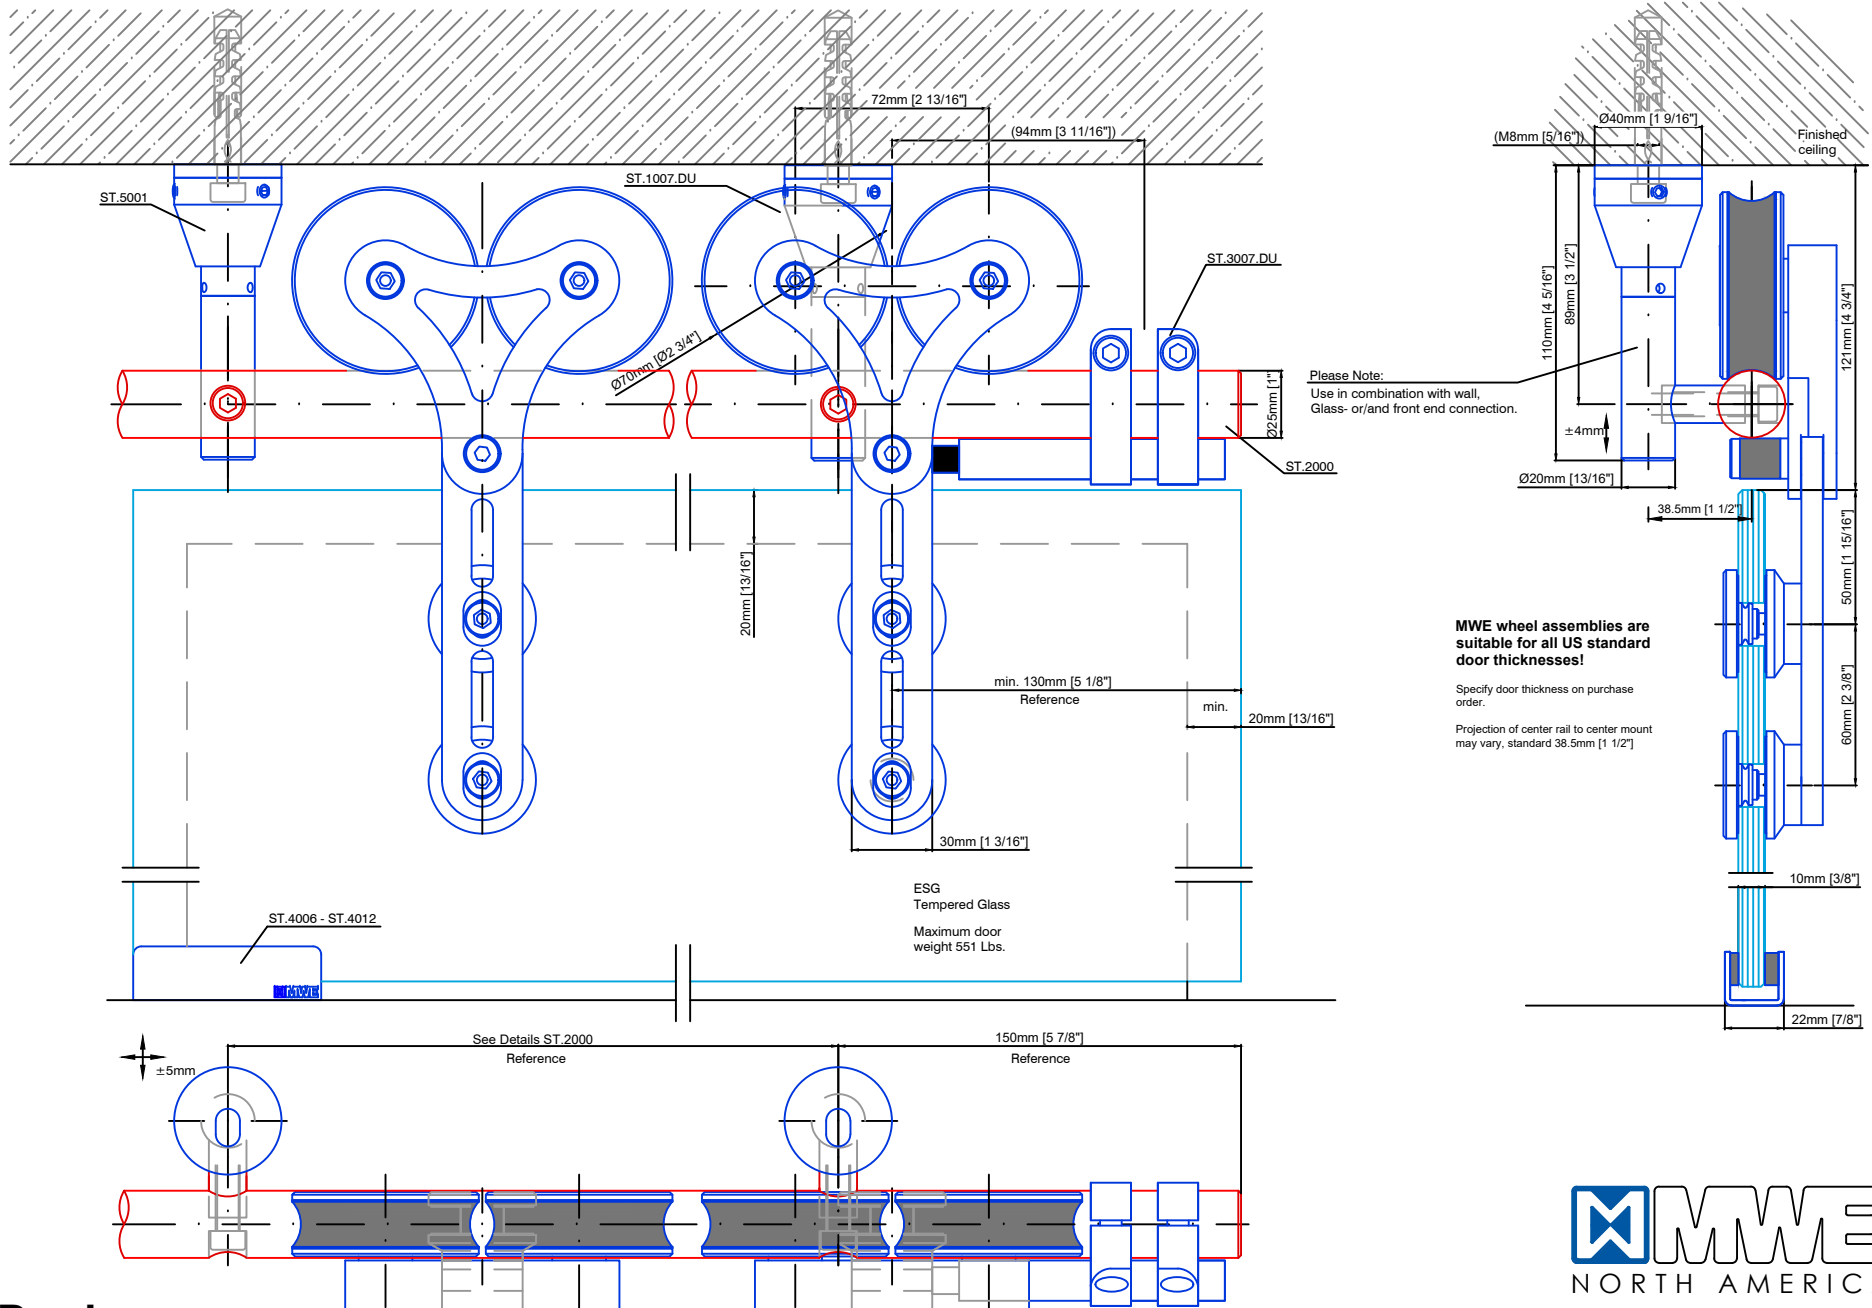

Please Note:
 Use in combination with wall, glass- or/and front end connection.

MWE wheel assemblies are suitable for all US standard door thicknesses!

Specify door thickness on purchase order.

Projection of center rail to center mount may vary, standard 38.5mm [1.52"]

Duplex ST.1007.DU

Date Prepared: July 2018

Prepared By: CDA | JRT



Email: info@mwe-na.com
www.mwe-na.com